



Model G412

Full Height Turnstile (double door)


FU634 "hwnj gk j v'wtpuvkq"ku'v'j g'j k j guv'ugewtk' "hpf "qHwtpuvkq"cpf "f guk pgf "lp"q qwdrg"q qqt"V' r g"tat"r gf guv'kcp"ceeguu." y j lej "ecp"o cng"uvtlevgt"hteg"eqpvtr'v' cp"qv' gt"V' r g05261538"uvc'p'guu"uvgrntco gy qtn'v'q"tgukuv'j ctuj gt"ekewo uvcpegu0 K'ku"uwlcdrg"tat"ctgcu'y kj "j k j "ugewtk'0*g0 GGo dcuu'."uvcf kwo ."dcpm'1ckd'qk'Hgrf ."eqpvtwev'kp"ukg."uvcv'kp+0

Features


- Vy q'y c{"qt"qpg'y c{"y qtnlpi 0
- 526"dtwuj gf "uncpgrguu"uvgnf wtdng"cpf "cpvktwu0
- Vj g"o qxgo gpvy kj "cduqtdgt"utwewtg."o cnlpi "vj g"r tqf wev" qr gtcvg"xgt{"swlgrf0
- Uwr r qtvlpvgi tcvgf "y kj "cp{"v{r g"qh"ceeguu"eqvtrhlu{ vngo u0
- Cpvktvclpi "hwpevqp"qprf "qpg"r gtupr"r cuugu"cv"qpg"vo g0
- Utwewtg"qh"vtwntpi "vq"eqpvclp"ecdng"vf {"pukf g"vj g"ecug0
- I tggp"cpf "tgf "NGF"pf lecvqt"r kur r{"r cuulpi "uncwu0
- KR87"y cvgtr tqqh"hxgn"pf qqt1qwf qqt"lug0
- Hktg"uchgv{"tgswtgo gpw."cto u"qr gp"cwqo cvlecnf0
- Gpv{"f kgevkp"ecp"dg"eqvtrngf "o cpwcnf "vj tqwi j "rten0
- Gcu{"vq"pucnfcpf "o clpvclp0
- 5"fgctu'y ctcpv{"uwr r qtv0

Customized Service

- Ocvgtkrlqr vkpcr0
- ; 28"qt"3428"tqvqtu"qr vkpcr0
- Cr r gctcpeg"eqrqt"ecp"dg"ewuvqo k gf "dcugf "qp" lpucnfcvkp"gpvktqpo gpv0
- Flo gpukpu"ecp"dg"ewuvqo k gf "vq"o ggv{"qwt" tgsvguv0
- Nqi q"ecp"dg"ewuvqo k gf 0
- Rlewtg"j k j "tguqmwkp"cpf "uepgg"r lewtg"ecp" dg"ewuvqo k gf

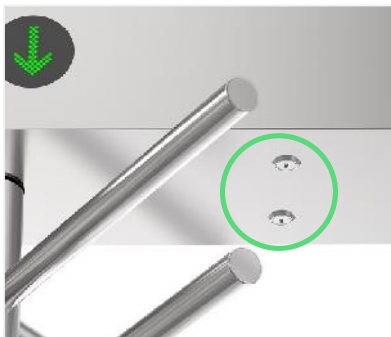


Manually Control Entry

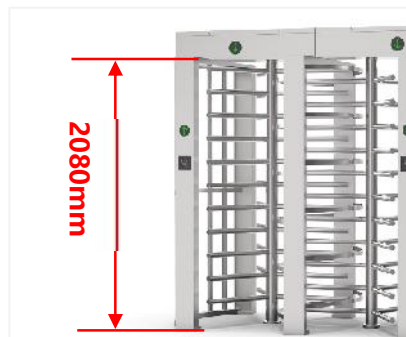

2080mm High Inner Space



304SS Waterproof

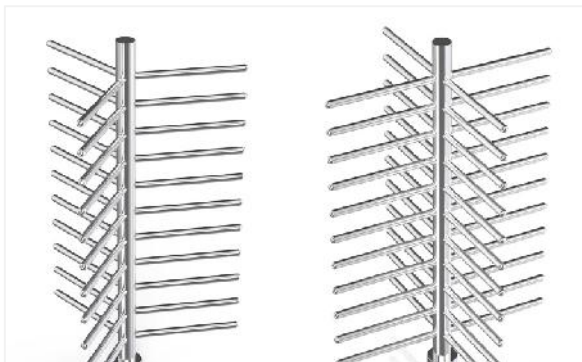

90°/120° Rotor Optional (three or four



Anti-trailing Function: one person can pass at one time

Access Control System

Turnstile gates can be well integrated with any 3rd party access control systems



Card Solution



QR/Bar Code Solution



Biometric Solution



Remote Control



Touchless Button



Card



QR Code



Fingerprint



Face



Palm Vein

G412 with card solution installed at the




Specifications


Model No.	G412
Type	Full Height Turnstile
Framework Material	304 Stainless Steel
Dimension	2200 * 1250 * 2300mm
Inner Height	2080mm
Arm Support	120° rotors with 3 sections or 90° rotors with 4 sections
Net Weight	350kg/pcs
Passage Width	675mm/lane
Passing Direction	Single directional / Bi-directional
MCBF	10 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	40W
Operation Temperature	-15 °C - 60 °C
Operation Humidity	0 ~ 95% (No freeze)
Working Environment	Indoor / Outdoor
Flow Rate	30 people per minute
LED Indicator	Two LED indicators on top: green → entry, red × no entry
Communication	Dry contact, Relay signal, RS485
Emergency	Arms will open automatically
Flexibility	Integrate with any access control




Dimensions

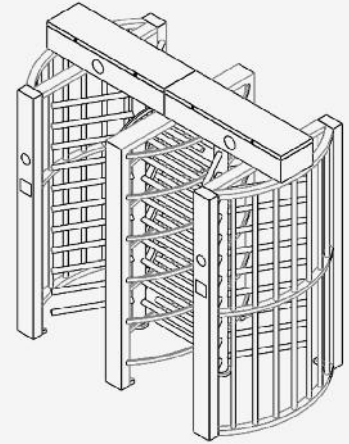

Front View

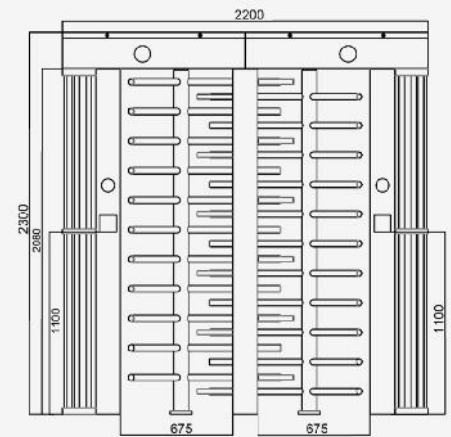

Side View

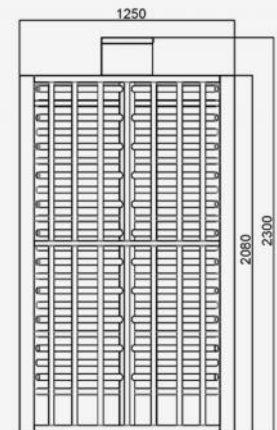

Top View

