

Network IR Waterproof External Camera

NM72T

Full HD: 1080P video resolution with H.265 compression

Smart: Intelligent motion detection


Easy Install: Suspended quick installation structure

Easy Setup: Full function by IE configuration



FEATURES

- Varifocal lens 6mm~22mm
- 0 lux@8mm IR led x 36, range up to 50 meters
- Support auto white balance, auto exposure, auto gain, AES
- Built in IR cut with Day & Night function
- Support pre-recording function
- Support snapshot, remote recording by schedule setting
- IP66 water proof

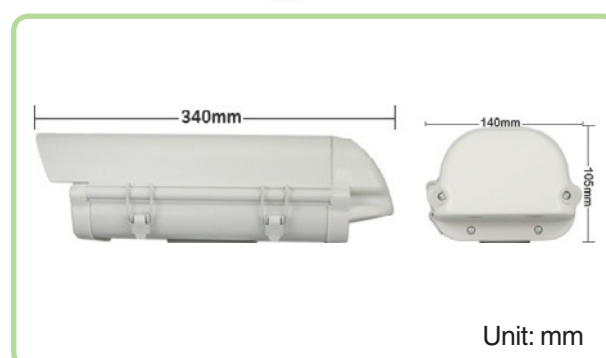

Model	NM72T	NM72TA	NM72TP	NM72TW	NM72TPA	NM72TWA	NM72TSA	NM72TSPA	NM72TSPA
Function									
Audio	-	●	-	-	●	●	●	●	●
PoE	-	-	●	-	●	-	-	●	-
Wifi	-	-	-	●	-	●	-	-	●
MicroSD Slot	-	-	-	-	-	-	●	●	●

SPECIFICATIONS

Camera	
Image Sensor	1/2.8", 2.0 MP SONY Exmor CMOS
Resolution	Main stream: 1920x1080, 1280x720 Sub Stream: 704x576
Frame	2MP and below @25fps, support 1 ~ 30 fps/s adjustable
Video Processing	H.265 Video encoding, support dual-stream AVI format, code stream 0.1Kpbs ~ 6Mbps
Minimum Illumination	0.01 Lux@F1.2, 0 Lux with IR
Shutter Speed	1/3s ~ 1/10,000s
Lens	6mm~22mm Varifocal Lens
Day & Night	ICR
BLC Support	Support
DNR	3D DNR
WDR	Digital WDR
Privacy Mask	Yes
Function	
P2P	Support (QR Code)
Password Protection	Support
Network Protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/ UPnP/ONVIF

Intelligent Alarm	Motion detection, Network disconnect, IP address conflict
System Compatibility	ONVIF
Interface	
Network Interface	RJ45 10/100M Adaptive Ethernet Interface
WIFI	Optional
MicroSD Slot	Optional
PoE	Optional (IEEE802.3af)
Audio Processing	Optional (G.711)
Audio-In	1 x RCA
Audio-Out	1 x RCA
Alarm Input / Output	Optional
General	
IR Leds	8mm x 36 pcs
IR Range	Up to 50m
Casing	Aluminum
Protection	IP66 Water proof
Power Supply	PoE or DC12V
Working Temperature	-10°C ~ 50°C
Working Humidity	90% or less
Weight	705g